




RCII 3-ROW DIMENSIONS

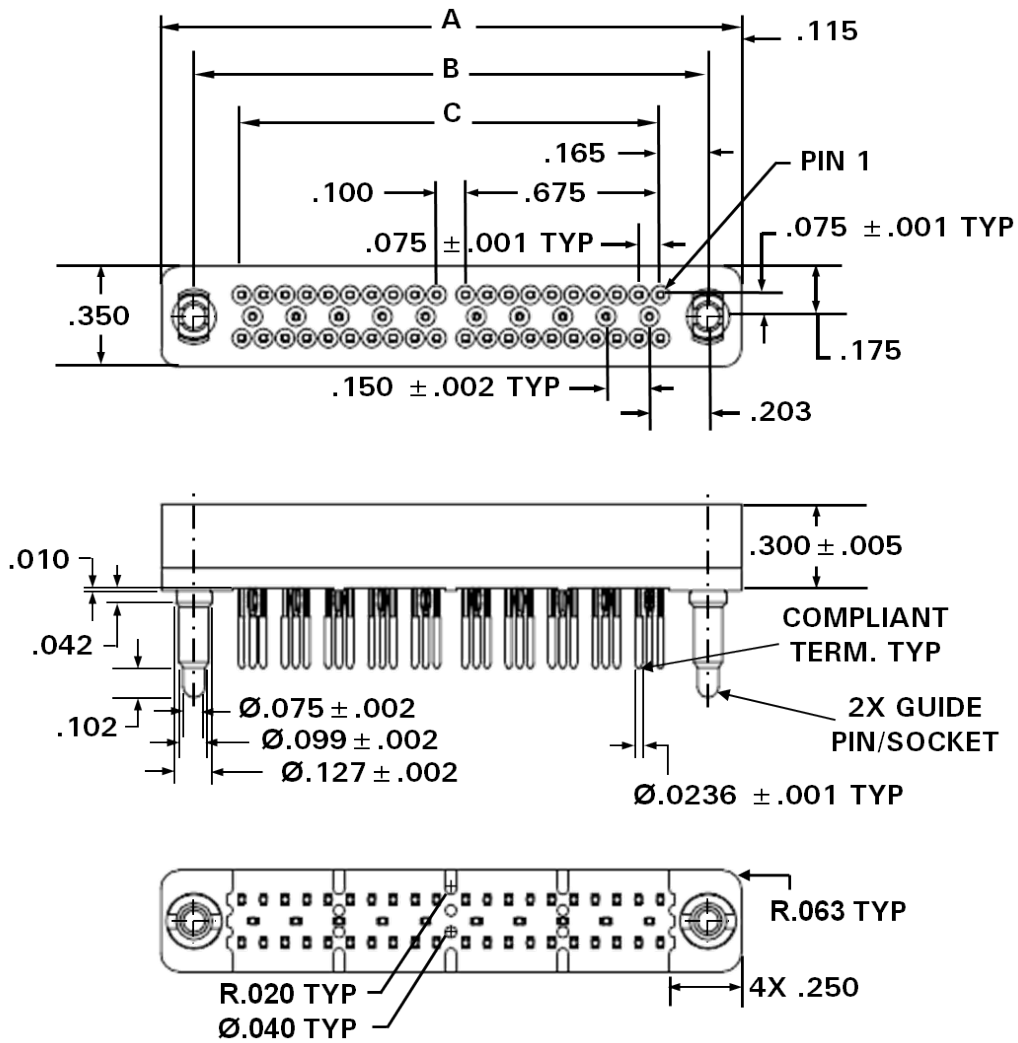

| DIMENSIONS | | | |
|------------|-------|-------|-------|
| SIZE/BANKS | A | B | C |
| 25/1 | 1.235 | 1.005 | 0.675 |
| 50/2 | 2.010 | 1.780 | 1.450 |
| 75/3 | 2.785 | 2.555 | 2.225 |
| 100/4 | 3.560 | 3.330 | 3.000 |

PWB-PLATED THRU-HOLE RECOMMENDATIONS:

Board material: FR-4 (or equivalent) with 1.0 oz. copper

Board thickness: 0.058" minimum

Drilled hole: Ø 0.033"

Copper plating thickness: 0.0020"

Tin-lead plating thickness: 0.0005"

Finished hold diameter: Ø 0.028" (Ø 0.028" ± 0.002" required)