


Shell Size	Dimensions in mm (inches)																	
	L1		L2		L3		L4		D1		D2		D3		W1		Max. Cable	
A	31.4	(1.24)	1.5	(0.06)	21.4	(0.84)	10.4	(0.41)	11.9	(0.47)	14	(0.55)	12	(0.47)	7	(0.28)	5.5	(0.22)
B	33.2	(1.31)	1.5	(0.06)	22.4	(0.88)	11.4	(0.45)	13.9	(0.55)	15.9	(0.63)	13.9	(0.55)	8	(0.31)	6.5	(0.26)
C	32.7	(1.29)	1.5	(0.06)	22.7	(0.89)	11.7	(0.46)	14.5	(0.57)	16.5	(0.65)	14.5	(0.57)	10	(0.39)	8	(0.31)
D	35.2	(1.39)	1.5	(0.06)	23.2	(0.91)	12.2	(0.48)	17.6	(0.69)	19.6	(0.77)	17.6	(0.69)	12	(0.47)	10	(0.39)
E	38.3	(1.51)	1.5	(0.06)	23.2	(0.91)	12.2	(0.48)	21.9	(0.86)	23.9	(0.94)	22	(0.87)	14	(0.55)	11.5	(0.45)
F	52.6	(2.07)	2.2	(0.09)	34.1	(1.34)	18.1	(0.71)	29.8	(1.17)	33	(1.3)	30	(1.18)	21	(0.83)	17.5	(0.69)

Wire Size Recommendation



Contact Size		Wire Size
mm	Inches	
.5	.02	30-26 AWG
.7	.03	26-22 AWG
.9	.04	26-22 AWG
1.3	.05	22-20 AWG
2.0	.08	16-12 AWG

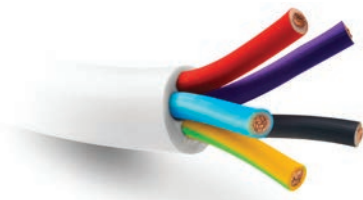